

BWS Series Datasheet

Insulated Wirewound Resistors | Axial and SMD Version
Fiberglass core | Bakelite Moulded case

ORDERING CODE-Example

New SAP Part Nr.:

BWS	110	K	T	-	73-	150R	AA
Serie	* Power rating	Tol. J = ±5% K = ±10%	Pack-Code T = Tape (ammo pack)	TCR - Base on spec.	Forming type 73- Inner Taping dimension ZB- Z version	R Value	Special AA = Standard

Historical VTM Part Nr.:

BW234 - 0	10	T	150R
Type	Tol. ±10% = K	Pack-Code T = Tape (ammo pack)	R Value

RZB4	6720	K	K	-	13	150R
Type	Size	Tol.	K = Blister tape reel	TC	Reel diam.	R Value

APPLICATIONS

- Automotive
- Charger
- Alternative Energy
- Power Supply
- Home Appliances
- Industrial


FEATURES

- Precision Type
- "Z" preforming ; Other preforming available
- High insulation voltage
- RoHS & REACH Compliant

ELECTRICAL SPECIFICATIONS

Type		BWS110	BWS210
Historical Part Number	AXIAL	BW234-0	BW235-0
	SMD	RZB4	RZB5
Nominal Power Rating	* P ₂₅	1,1	2,1
	P ₇₀	0,75	1,5
Resistance Range	[Ω]	0R1 ... 1K2	0R1 ... 2K4
		(Other values upon request)	
E-Series (preferred)		E24 (5%) ; E12 (10%)	
Tolerances	±[%]	J = 5% ; K = 10%	
Temperature Coefficient	±[10 ⁻⁶ K ⁻¹]	Depends on the value, please check the table below	
Working Temperature Range	[°C]	-55 ... +175	
Thermal Resistance	[KW ⁻¹]	140	80
Insulation Resistance IEC60115-1 clause 4.6	[MΩ]	> 10 ⁴	
Max. Working Voltage	[V] _{RMS}	$\sqrt{P_{70} \times R}$	
Dielectric Withstanding Voltage IEC115-1 clause 4.7 (1[min])	[V] _{RMS}	700	1000

DIMENSIONS [mm]

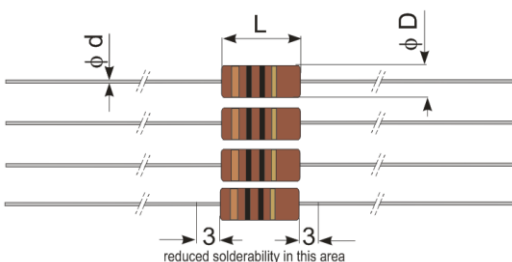

Type	Historical P/N:	L ±0,2	Ø D ±0,2	Ø d ±0,02
BWS110	BW234 - 0	9,9	3,6	0,8
BWS210	BW235 - 0	14,3	5,7	1,0 *

* Special lead diameter 0,8mm available

BWS Series Datasheet


PERFORMANCE DATE

Type		BWS110	BWS210
Historical Part Number	AXIAL	BW234-0	BW235-0
	SMD	RZB4	RZB5
Derating Linear	[°C]	70...175 (0W)	
Climatic Category		55/175/56	
Failure Rate <i>(Total, ϑ_{θ}, max, 60[%] cont. lev.)</i>	[10 ⁻⁹ h ⁻¹]	appr. 100 depends on value	
Endurance <i>IEC60115-1 clause 4.25 (P₇₀, @ 70[°C], 1000[h])</i>	±[%]	5,0	
Damp Heat, Steady State <i>IEC60115-1 clause 4.24 (40[°C], 93[% r.h.], 56[d])</i>	±[%]	2,0	
Climatic Sequence <i>IEC60115-1 clause 4.23</i>	±[%]	2,0	
Resistance to Soldering Heat <i>IEC60115-1 clause 4.18 (260^{±5}[°C], 10^{±1}[s])</i>	±[%]	0,2	
Surge Test <i>IEC61000-4-5</i>	±[%]	2,0	
Terminal Strength	±[%]	1,0	
Terminal Tensile Strength	[N]	40	
Solderability <i>IEC60068-2-20 (245^{±5}[°C] 3^{±0,5}[s])</i>		Solder bath method (> 95% coverage)	
Marking <i>IEC60062</i>		Color code	

TEMPERATURE COEFFICIENT

New P/Nr. Type	Historical P/Nr:	Temperature Coefficient (ppm K-1)					
		TC ±1000	TC ±800	TC ±600	TC ±400	TC ±300	TC ±150
BWS110	BW234 – 0	——	——	OR1 ... OR15	——	OR16 ... OR62	OR68 ... 1K2
BWS210	BW235 – 0	OR1 ... OR16	OR18 ... OR68	——	OR75 ... 2K4	——	——

PULSE PERFORMANCE

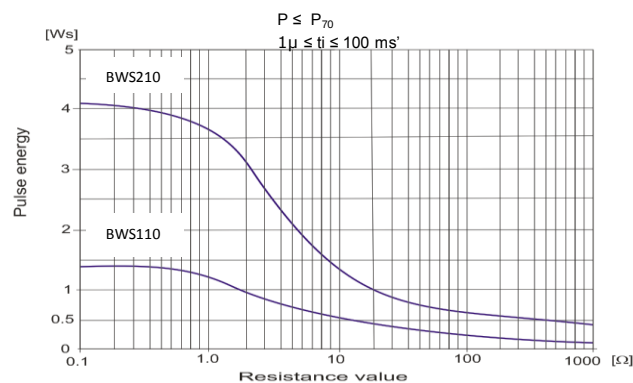


The curves are expressing the range, where no substantial effects are caused of recurrent pulses.
A single pulse with a 3 – 5 times higher value will cause the destruction of the resistor

BWS Series Datasheet



PACKAGING

The standard packaging for BWS in axial type is taped, dimensions below.



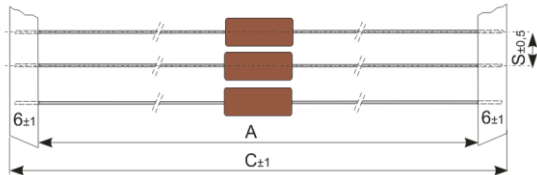


Type	Historical P/N:	Pack Code	Pieces	Forming Type (Inner Taping dim.)	A	C	S
BWS110	BW234 - 0	T = Taped	1000	73-	73	85	5
BWS210	BW235 - 0	Ammo pack	1000		73	85	10

SMD LEAD CONFIGURATIONS

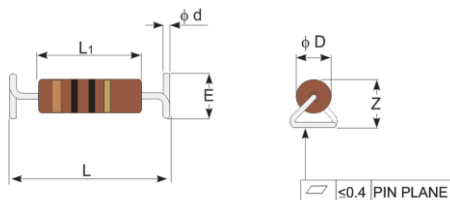

Type	Historical P/N	Size	L	L ₁ ±0,2	Ø D ±0,2	Ø d ±0,02	E	Z max	l	a	b
BWS110	RZB4	6720	17,0±1,0	9,9	3,6	0,8	5,0±0,5	7,5	14	10	10
BWS210	RZB5	8424	20,9±1,0	14,3	5,7	1,0		8,0	16		

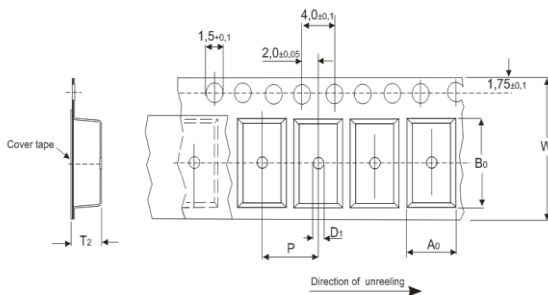

Type	A0	B0	W	D1	P	T2
BWS110	5,7	16,7	24	2,0	8	7,6
BWS210	6,0	21,4	32	2,0	12	8,1

Type	W1	W2	N	A
BWS110	25,4	29,5	90	330
BWS210	33,4	37,4	100	380

Type	Packaging	Pieces
BWS110	13(inch) Blister tape	1000
BWS210	15(inch) Blister tape	

Ordering Code for SMD :

BWS	110	J	K	-	ZB-	150R	AA
Serie	* Power rating	Tol.	Pack-Code	TCR	Forming type	R Value	Special
		J = ±5% K = ±10%	K = Blister Tape Reel	- Base on spec.	ZB- Z version		AA = Standard

BWS Series Datasheet

ALTERNATIVE LEAD CONFIGURATIONS

This type BWS is also available in a different pre-forming, as shown below, other's upon request.

THOUGH HOLE VERSION

			
Axial Goal Post (AG-)	Axial Goal Post Kink (AK-)	Radial (RD-)	Radial 2 Kink (RK-)